



PR portable wheel scale.

Ideal for controlling the weight of your vehicles.



- Low profile wheel scale of 60 mm height.
- Optional rubber ramps for a better access.
- On-ground or in-built installation.
- Two handles for easy mobility.
- Made in aluminium.
- Maximum capacity of 20.000 kg.
- Installation on-ground or in-built.
- Connection for indicators M3, K3i and K3.

Handles

The PR series has 2 handles for an easy transportation.



Rear protection

The PR series is protected with stainless steel plates.



PRL with 8 load cells



PRM with 6 load cells



PRS with 4 load cells.



PRX with 4 load cel.

4 sizes in order to adapt to your requirements.

Main functions

The PR platforms are designed for you to weigh very easily and efficiently. With the PR series you can quickly know the weight of all vehicles by weighing each axle separately.

The platforms are made of high strength aluminum, of only 60 mm height and with a load capacity of 20,000 kg.

They have handles to facilitate mobility and transport and can be easily stored thanks to their flat profile.

The PR series can be installed on-ground or in-built, thus creating mobile or permanent weighing stations.

The optional rubber ramps allow for an easy access to the platform.

M3P Indicator

- Suitcase with built-in K3 indicator and printer.
- Built-in junction box to connect up to 4 platforms.
- Built-in printer.
- Prints weight per axis and total.
- RS 232-C output to connect to PC or wireless indicator.
- Prints date and time.

Power: 230 V/50 Hz, 11 V AC

Battery: Working time 30/60 hours.



Indicator M3

- Alphanumeric keyboard.
- Backlit display.
- Built-in thermal printer.
- Capacity of 1,300 digits.
- Battery charging indicator.
- Auto power-off function.
- Date and hour.
- Reports function.

Information

- By vehicle
- By registration
- By operator
- By date (day-month).
- By operator and date.



Power:

- 220 V by transformer.
- Battery 6V/10Ah.
- External input 12 V.



Wireless connection


Our remote printer PR3-W and our remote indicator RD3-W work wireless, and can be placed anywhere to a maximum distance of 50 m, without any need of installing cables.

(only for K3 and K3i indicators)

Technical characteristics

Model	PRX-3T	PRS-10T	PRM-15T	PRL-20T
Reference	60705	60706	60707	60708
Capacity	3Tn	10Tn	15Tn	20Tn
Resolution	0,5 kg	2 kg	2 kg	5 kg
Structure	Aluminium			
Charging cells	HBC Rebel Clase C3			
Power	230 V / 50 Hz ,11 V AC			
Working temperature	+0°C / -40°C			
Height (mm)	60			
Total size (mm)	385 x 480	500 x 510	700 x 560	900 x 610
Total net weight (kg)	11	21	32	45

External dimensions (mm)

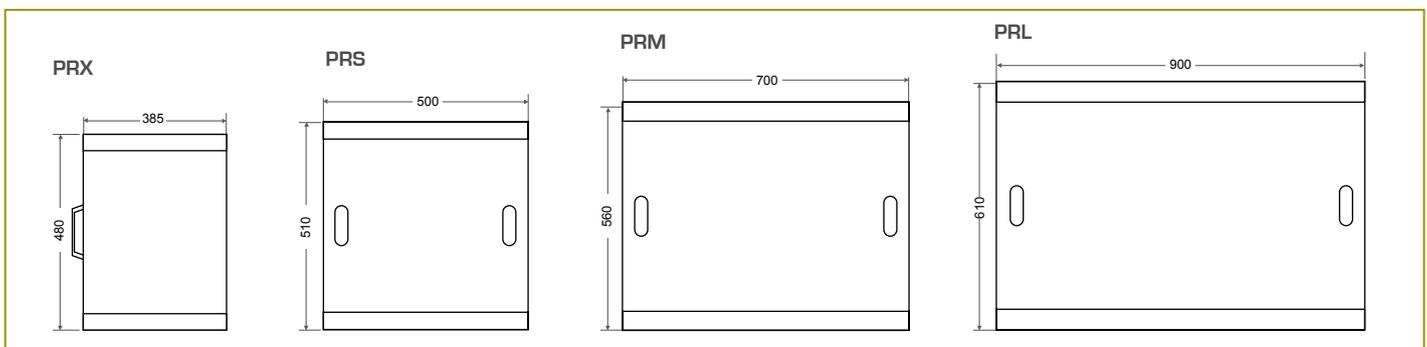

Available options

- M3 or M3P indicators.
 - K3 and K3i Indicators
 - PR3 and PR3-W Printers
- (only for K3 and K3i)*
- Remote displays RD3 and RD3-W
- (only for K3 and K3i)*
- Rubber ramps